

\*MB\* PA12 Ø 100x90 PA12 PHL \*~~12~~\* 140115 - 15:16:20 made in Italy

## PA 12 PHL

Tubo per caricamento granuli  
For automatic grain loading

### CARATTERISTICHE

- Tubo in Poliammide 12 PHL flessibile per bassa pressione plastificata, stabilizzata alla luce e al calore
- Prodotta con materia prima atte a soddisfare le normative DIN 73378/74324

### RESIN FEATURES

- Polyamide 12 PHL flexible tubing, plasticized, light and heat stabilized
- Produced with raw materials designed to meet DIN 73378/74324 standards

### LUNGHEZZE STANDARD

Barre da 6 m  
(tolleranza sul taglio -0/+50 mm)

### STANDARD LENGTH

6 m lenght cut piece  
(tolerance on length -0/+50 mm)

### LEGENDA COLORI\*

### COLORS LEGEND\*

T

### APPLICAZIONI

### APPLICATIONS



Caricamento granuli  
Grain loading



Cod.	Dimensioni tubo (mm) Hose dimensions (mm)			Peso Weight g/m	Colori Colors
	o Ø e	i Ø i	Spessore Wall thick.		
12PHL44X51X6	51 ± 0,3	44	3,5 ± 0,3	548,7	T
12PHL50X60X6	60 ± 0,3	50	5 ± 0,3	907,6	T
12PHL53X61X6	61 ± 0,3	53	4 ± 0,3	752,5	T
12PHL55X63X6	63 ± 0,3	55	4 ± 0,3	778,9	T
12PHL60X70X6	70 ± 0,3	60	5 ± 0,3	1072,6	T
12PHL62X70X6	70 ± 0,3	62	4 ± 0,3	871,3	T
12PHL70X80X6	80 ± 0,3	70	5 ± 0,3	1237,7	T
12PHL72X80X6	80 ± 0,3	72	4 ± 0,3	1003,3	T
12PHL80X90X6	90 ± 0,3	80	5 ± 0,3	1402,7	T
12PHL90X100X6	100 ± 0,3	90	5 ± 0,3	1567,7	T


### Caratteristiche tecniche a colpo d'occhio

Technical features at a glance

Tubo PA12 PHL MB-Longlife™

\* Riferimento fine catalogo

\* End of catalog reference

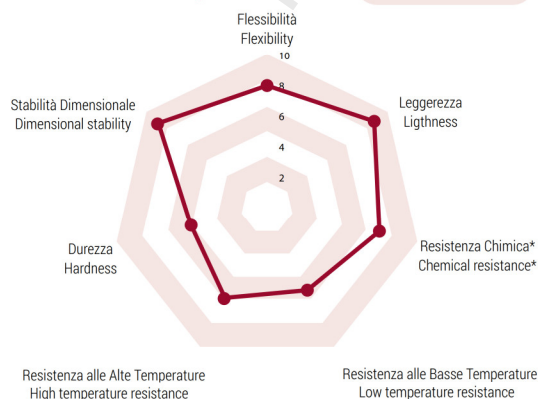

### Pressioni espresse in % in funzione delle temperature

Pressure values expressed as a % in relation to temperature

Da -40°C a +80°C  
From -40°C to +80°C

