

Description


Volume Booster TS100 is one-to-one Signal to output supply Air, when used with a positioner/actuator, it is a control device to increase the stroking speed of control valves.

Features




- + Precise and fast response
- + Soft seats provide tight shut off
- + Adjustable Sensitivity
- + Options available (High and Low temperature)
- + Speed up valve regulation

Installation examples

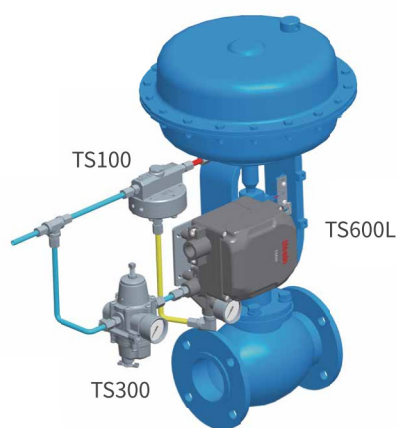

Single actuator

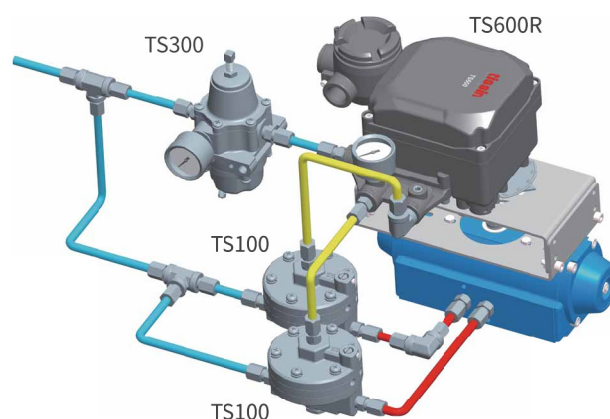


Double actuator

Specifications

Model		TS100	TS110	TS120
				
Max supply pressure		1MPa	1MPa	1MPa
Signal and output pressure		0.14~0.7MPa	0.14~0.7MPa	0.14~0.7MPa
Signal to output ratio		1:1	1:1	1:1
Linearity		1%	1%	1%
Flow capacity (CV)	Output	1.3	2.1	5.2
	Exhaust	1.2	2.7	4.9
Signal port		NPT1/4, PT1/4	NPT1/4, PT1/4	NPT1/4
Supply / Output port		NPT1/4, PT1/4	NPT1/2, PT1/2	NPT3/4
Ambient temperature	Standard type	-20°C~70°C	-20°C~70°C	-20°C~70°C
	High Temp.	-20°C~120°C	-20°C~120°C	-20°C~120°C
	Low Temp.	-40°C~70°C	-40°C~70°C	-40°C~70°C
Material		Aluminum die cast	Aluminum die cast	Aluminum die cast
Weight		0.55kg	0.75kg	1.9kg

Materials of construction

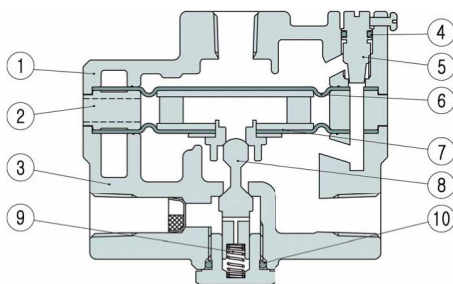

No.	Title	Material	No.	Title	Material
1	Cover	ALDC12	6	Diaphragm upper	NBR
2	Ring exhaust	ALDC12	7	Ass'y diaphragm	AL/NBR
3	Body	ALDC12	8	Poppet	STS
4	O-ring	NBR	9	Spring seat	STS
5	Adjust screw	STS	10	O-ring	NBR

Product number

Model			
Supply / Output port	1/4"	TS100	N P
	1/2"	TS110	
	3/4"	TS120	
Air connection type	NPT		N P
	PT		
Ambient temperature	-20°C~70°C		S H L U
	-20°C~120°C		
	-40°C~70°C		
	-60°C~70°C		

